

Data sheet


valid from: 6/29/21



Ball valve coloro type 355 PVC-U With solvent cement sockets metric

Model:

- Monobloc structure
- Lever blue
- Ball seal HD-PE / lubricant compound
- Only bulk pack GP are delivered

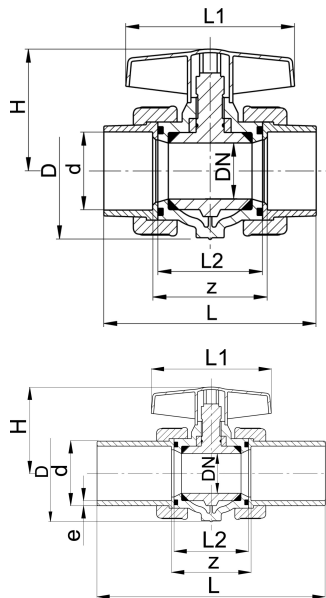

d	DN	PN	EPDM	SP	Weight	D	H	L	L1	L2	z	closest
(mm)	(mm)	(bar)	Code		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	inch
												(inch)
20	15	16	161 355 002	12	0.128	49	51	92	78	54	60	½
25	20	16	161 355 003	12	0.182	54	58	104	92	60	66	¾
32	25	16	161 355 004	12	0.242	64	63	113	92	63	69	1
40	32	16	161 355 005	6	0.429	78	77	132	116	74	80	1 ¼
50	40	16	161 355 006	6	0.576	90	83	147	116	79	85	1 ½
63	50	16	161 355 007	6	1.001	112	102	175	140	91	97	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>