


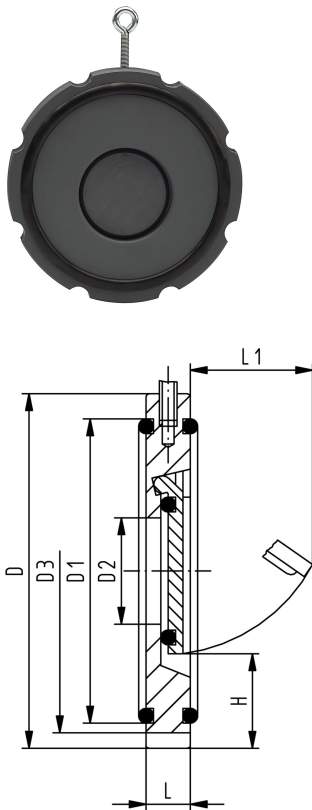

Wafer check valve type 369 PVC-U Without spring

Model:

- Supporting eyelets for simple fitting
- Suitable for vertical and horizontal mounting

Installation instruction:

- Installation between ISO/DIN (all dimensions) and ANSI/BS flange adaptors (all except DN32 and DN125)
- Installation with ANSI/BS flange adaptor: for wafer check valves DN40 to DN80 you have to use ANSI/BS flange adaptors with the next bigger dimension (example DN40 wafer check valve between DN50 ANSI/BS flange adaptor)
- Centering by body diameter (ISO/DIN by D3, ANSI/BS by D)
- Sealing with special flange gasket (except DN32, o-ring)
- A stabilizing zone of at least 5 times nominal diameter (DN) should be provided before and after the wafer check valve (10 times DN is recommended)
- No direct installation on pump flange or following bend allowed
- The using of PVC-U pipe PN16 is only possible up to d63
- Wafer check valves without reset spring are not recommended for pulsating flows (production of noise)

d (mm)	DN (mm)	Size (inch)	PN (bar)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
40	32	1 ¼	10	161 369 002	1	0.110	161 369 022	1	0.108
50	40	1 ½	10	161 369 003	1	0.174	161 369 023	1	0.202
63	50	2	10	161 369 004	1	0.273	161 369 024	1	0.277
75	65	2 ½	10	161 369 005	1	0.352	161 369 025	1	0.386
90	80	3	10	161 369 006	1	0.560	161 369 026	1	0.591
110	100	4	10	161 369 007	1	0.651	161 369 027	1	0.667
140	125	5	10	161 369 009	1	0.791	161 369 029	1	0.856
160	150	6	6	161 369 010	1	1.153	161 369 030	1	1.207
225	200	8	6	161 369 011	1	2.215	161 369 031	1	2.306
280	250	10	6	161 369 012	1	3.850	161 369 032	1	3.915
315	300	12	6	161 369 013	1	7.059	161 369 033	1	5.300

d (mm)	D (mm)	D1 (mm)	D2 (mm)	D3 (mm)	H (mm)	L (mm)	L1 (mm)	Opening pressure vertical (mbar)	Opening pres- sure horizontal (mbar)	Minimum water col- umn for seal- ing (m)
40	85	59	18	85	25	15	22	10	1	2
50	105	74	22	95	27	16	27	10	1	2
63	124	90	32	109	29	18	40	10	1	2
75	137	110	40	129	31	20	55	10	1	2
90	175	130	54	144	32	20	67	10	1	2
110	175	150	70	164	31	23	67	10	1	2
140	195	178	92	195	35	23	94	10	1	2
160	222	192	105	220	41	26	100	10	1	2
225	279	256	154	275	38	35	152	18	1	2
280	340	306	192	330	41	40	180	18	1	2
315	410	342	227	380	41	45	215	18	1	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

Data sheet

valid from: 6/25/21



e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>