
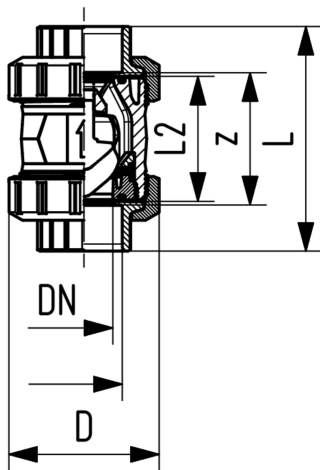




## Check valve type 562 PVC-U With solvent cement sockets Inch BS

### Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

| d    | Size   | DN   | PN    | kv-value            | EPDM        | SP | Weight | FKM         | SP | Weight |
|------|--------|------|-------|---------------------|-------------|----|--------|-------------|----|--------|
| (mm) | (inch) | (mm) | (bar) | ( $\Delta p=1$ bar) | Code        |    | (kg)   | Code        |    | (kg)   |
|      | 3/8    | 10   | 16    | 190                 | 161 562 061 | 1  | 0.120  | 161 562 071 | 1  | 0.120  |
|      | 1/2    | 15   | 16    | 180                 | 161 562 062 | 1  | 0.120  | 161 562 072 | 1  | 0.120  |
|      | 3/4    | 20   | 16    | 380                 | 161 562 063 | 1  | 0.250  | 161 562 073 | 1  | 0.270  |
|      | 1      | 25   | 16    | 460                 | 161 562 064 | 1  | 0.280  | 161 562 074 | 1  | 0.280  |
|      | 1 1/4  | 32   | 16    | 850                 | 161 562 065 | 1  | 0.490  | 161 562 075 | 1  | 0.490  |
|      | 1 1/2  | 40   | 16    | 1080                | 161 562 066 | 1  | 0.760  | 161 562 076 | 1  | 0.770  |
|      | 2      | 50   | 16    | 1670                | 161 562 067 | 1  | 1.378  | 161 562 077 | 1  | 1.370  |
| 75   | 2 1/2  | 65   | 16    | 2950                | 161 562 008 | 1  | 3.160  | 161 562 018 | 1  | 3.170  |
|      | 3      | 80   | 16    | 3600                | 161 562 069 | 1  | 5.070  | 161 562 079 | 1  | 5.090  |
|      | 4      | 100  | 16    | 4150                | 161 562 070 | 1  | 8.010  | 161 562 080 | 1  | 8.050  |

| D    | L    | L2   | z    | closest inch |
|------|------|------|------|--------------|
| (mm) | (mm) | (mm) | (mm) | (inch)       |
| 50   | 92   | 56   | 60   |              |
| 50   | 95   | 56   | 60   |              |
| 58   | 110  | 65   | 69   |              |
| 68   | 123  | 71   | 75   |              |
| 84   | 146  | 85   | 89   |              |
| 97   | 157  | 89   | 97   |              |
| 124  | 183  | 101  | 110  |              |
| 166  | 233  | 136  | 144  | 2 1/2        |
| 200  | 254  | 141  | 151  |              |
| 238  | 301  | 164  | 174  |              |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>